



APT

- Programmable time-cycle control for full time ranges present in 7 days
- 15 series of date combination available while choosing and setting week switch
- internal rechargeable back-up battery be able to reserving programs memory for long time




+ SPECIFICATIONS

TOP

MODEL		APT
RATED VOLTAGE		100~240VAC 50/60Hz
POWER CONSUMPTION		2VA
SETTING ERROR		8PFA
CONTROL OUTPUT		± 2 sec/day
FULL TIME RANGE		Rating Output:15A 250VAC Resistive Load
INSULATION RESISTANCE		Over 50M Ω /500VDC between power and another terminal
DIELECCTRIC STRENGTH		Over 2KV /1min between power and other terminal
LIFE	MECHANICAL	Min:100,000,000 Operation
	ELECTRICAL	Min:100,000 Operation at 15A 250VAC

+ CONNECTION DIAGRAMS & TIMING CHARTS

TOP

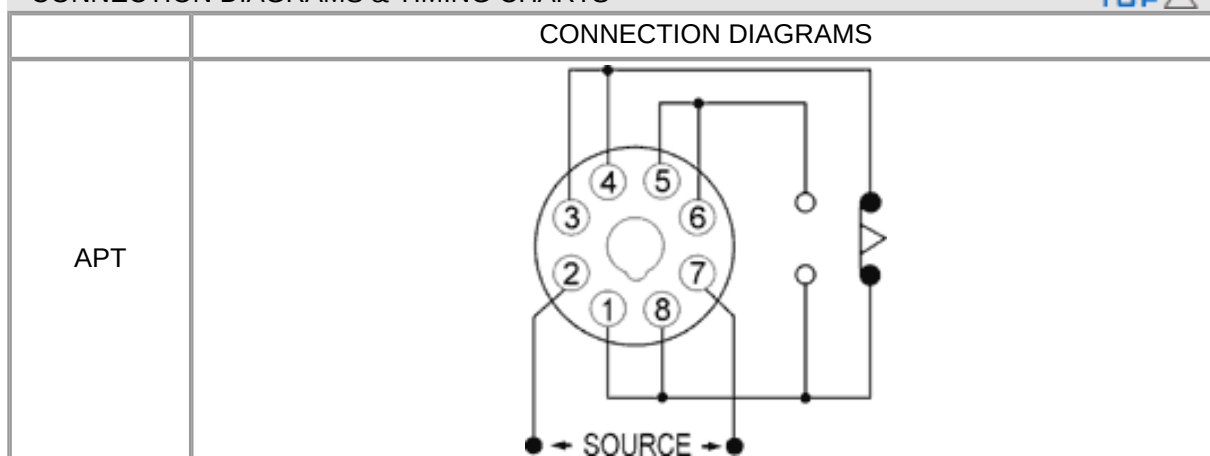

+ DIMENSION

TOP

