



AH3-ND AH3-ND3

- Using CMOS IC, high reliability and stability
- High repeat accuracy $\pm 1\%$
- Large transparent for easy adjustment and monitor
- Wide variety of type-15 time ranges.(0.1sec to 24hrs)



+ SPECIFICATIONS


TOP

MODEL		AH3-ND	AH3-ND3
DIMENSIONS		50H x 40W x 57.5D	50H x 40W x 57.5D
FULL TIME RANGE		9.9S, 99S Two range	9.99S, 999S Two range
MOUNTING & SOCKET	SURFACE(-N)	PF085A & SH-3	
	FLUSH(-Y)	Y-40 & US-08 • Y-40 & P3G-08	
RATED VOLTAGE		DC(V) : 12, 24, 48 AC(V) : 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60 Hz	
INDICATOR OPERATING		ON-Green UP-Red	
o/p CONTACT	MODEL	mode A/B	
	TIME LIMIT 1C		5A
	TIME LIMIT 2C	5A	
	INSTANTANEOUS 1C		5A

+ CONNECTION DIAGRAMS & TIMING CHARTS

TOP

	CONNECTION DIAGRAMS	TIMING CHARTS
mode A		Rt:Reseting time

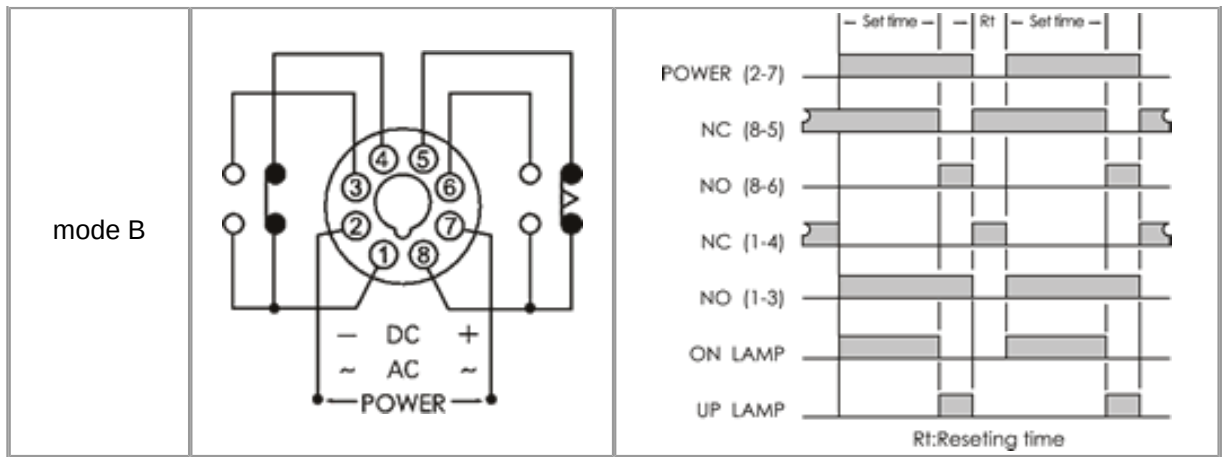

+ DIMENSION

TOP

