



T2C-N•T2C-Y•

- Two digits display counter
- Protection against power surge and high frequency interference
- Operating Mode-UP count or Down count(Y) option by user
- Counting speed: 250 cps or 60 cps
- Power off reset or contact(1+3)reset
- (1+3)Gate Function available
- DC 12V supplied for proximity switch or photoelectric switch(option by user)



+ SPECIFICATIONS


TOP ▲

MODEL		T2C-N•	T2C-Y•	
DIMENSIONS		60H x 48W x 75D	88H x 58W x 75D	
FUNCTIONS		<ul style="list-style-type: none"> • Operating mode: Up count or down count • Digital: Two digits display counter • Count input: Contact input (1+4 Input) • Counting speed: 250 cps or 60 cps • Reset system: Power off reset or contact(1+3)reset • Operating mode can order Self-Resetting(S),Down Count(Y) 		
MOUNTING & SOCKET	SURFACE(-N)	8PFA		
	FLUSH(-Y)		P3G-08 & US-08	
RATED VOLTAGE		DC(V) : 12, 24, 48 AC(V) : 12, 24, 110, 220, 240,380,415,440, 50/60 Hz		
INDICATOR OPERATING		Count up operating		
o/p CONTACT	MODEL	T2C-NX / YX	T2C-NP / YP	T2C-NG / YG
	TIME LIMIT 1C	5A	5A	5A
	TIME LIMIT 2C			
	INSTANTANEOUS 1C	1+4 Count input 1+3 Reset	1+4 Count input 1+3 DC 12V	1+4 input 1+3 Gate

+ CONNECTION DIAGRAMS & TIMING CHARTS

TOP ▲

CONNECTION DIAGRAMS	
T2C-NX / YX	

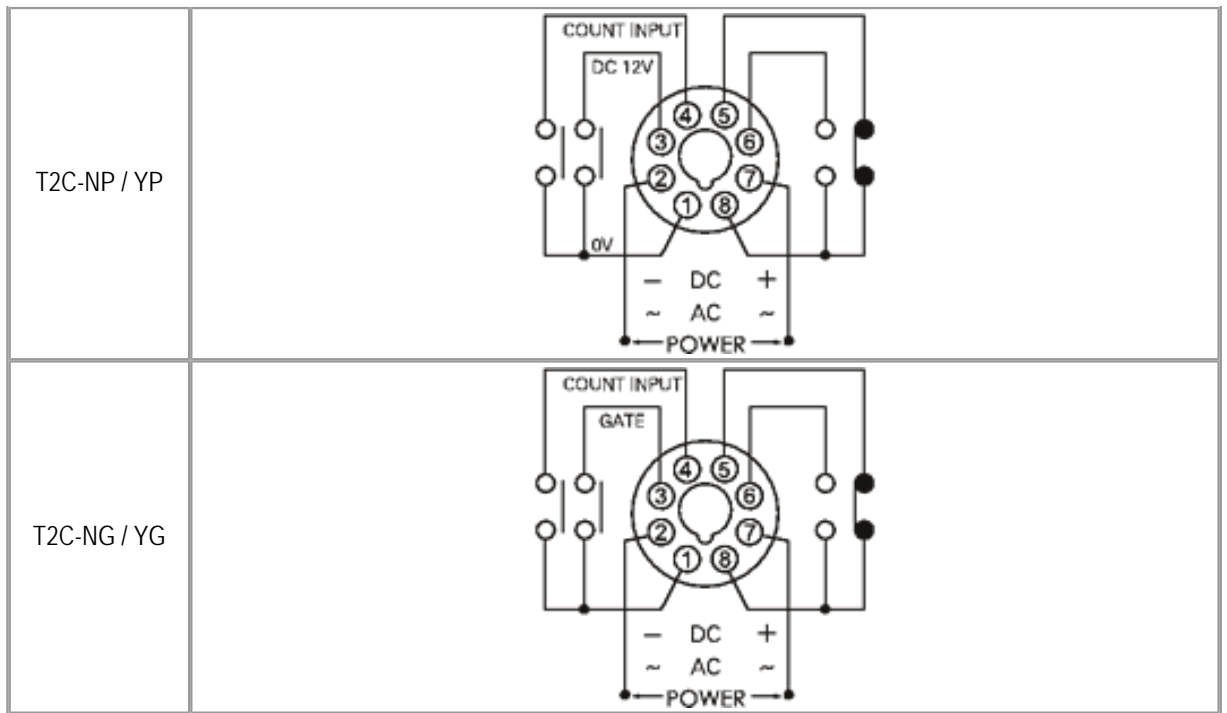

+ DIMENSION

TOP ▲

