

# DSENET<sup>®</sup> EXPANDING WITH EASE.



## DSE2510 & DSE2520 REMOTE DISPLAY MODULES



The DSE2510 and DSE2520 are display modules designed to work with the DSE7310 Auto Start and DSE7320 Auto Mains (utility) Failure control modules.

Up to three display modules can be connected to one host control module. They can be up to 1km away. The remote displays offer exactly the same instrumentation, control and monitoring capabilities as the host control module, including starting and stopping of the engine.

All three remote displays will show the same information at any one time, while the host controller is able to display different information.

The modules are simple to operate and feature the same user-friendly menu layout as the host module.

All communications and programming are done via the host module only. The remote devices simply mirror the programming of the host module making the system quick and easy to install.

### BENEFITS

- Expands the application possibilities of the DSE73xx Series by offering remote control and monitoring from up to 3 individual locations.

### OPERATION

The remote displays are operated via the START, STOP, AUTO and MANUAL soft touch membrane buttons on the front panel. The DSE2520 also has a TEST button. Both versions include load switch buttons. The main menu system is accessed using the five navigation buttons to the left of the LCD display.

For a detailed list of module features, please refer to the DSE7310 & DSE7320 Data Sheet.

### SPECIFICATION

#### DC SUPPLY

Continuous voltage rating  
8V to 35V Continuous

#### CRANKING DIP PROTECTION

Able to survive 0V for 50 mS, providing supply was at least 10V before dropout and supply recovers to 5V. This is achieved without the need for internal batteries

#### MAXIMUM STANDBY CURRENT

160mA at 12V 80mA at 24V

#### MAXIMUM OPERATING CURRENT

340mA at 12V 160mA at 24V

#### DIMENSIONS OVERALL

240mm x 181.1mm x 41.7mm  
9.4" x 7.1" x 1.6"

#### PANEL CUT-OUT

220mm x 160mm  
8.7" x 6.3"  
Max panel thickness 8mm (0.3")

### ENVIRONMENTAL TESTING STANDARDS

#### ELECTRO MAGNETIC CAPABILITY

BS EN 61000-6-2  
EMC Generic Immunity Standard (Industrial)  
BS EN 61000-6-4  
EMC Generic Emission Standard (Industrial)

#### ELECTRICAL SAFETY

BS EN 60950  
Safety of Information Technology Equipment, including Electrical Business Equipment

#### TEMPERATURE

Cold -30°C 60068-2-1  
Hot +70°C 60068-2-2

#### VIBRATION

BS EN 60068-2-6  
Ten sweeps at one octave/minute in each of three major axes  
5Hz to 8Hz @ +/-7.5mm constant displacement  
8Hz to 500Hz @ 2gn constant acceleration

#### HUMIDITY

BS EN 60068-2-30  
Test Db Cyclic  
93% RH @ 40°C for 48 hours

#### SHOCK

BS EN 60068-2-27  
Three half sine shocks in each of three major axes  
15gn amplitude, 11ms duration

#### BS EN 60529 DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

- IP65 (Front of module when installed into the control panel with the supplied sealing gasket)

**DEEP SEA ELECTRONICS PLC**

Highfield House  
Hunmanby Industrial Estate  
Hunmanby, North Yorkshire  
YO14 0PH England

**TELEPHONE**

+44 (0)1723 890099

**FACSIMILE**

+44 (0)1723 893303

**EMAIL**

sales@deepseapl.com

**WEBSITE**

www.deepseapl.com

Registered in England & Wales No.01319649

VAT No.316923457

**DEEP SEA ELECTRONICS INC**

3230 Williams Avenue  
Rockford  
IL 61101-2668 USA

**TELEPHONE**

+1 (815) 316 8706

**FACSIMILE**

+1 (815) 316 8708

**EMAIL**


sales@deepseausa.com

**WEBSITE**

www.deepseausa.com




## DSE2510 & 2520 TYPICAL CONNECTION

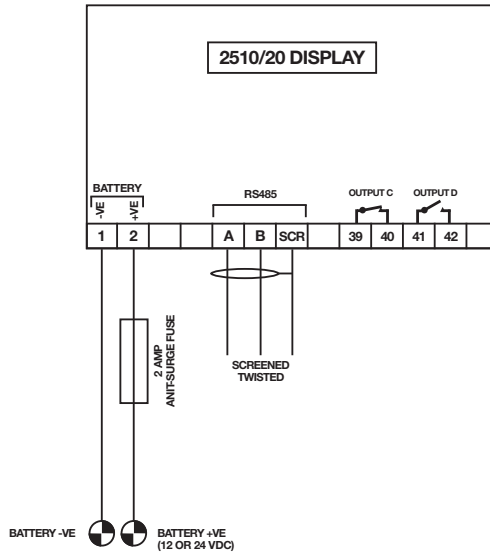

## MULTIPLE EXPANSION MODULES

**NOTE:** The connections from one module to another **MUST** be in a daisy chain fashion as shown. The cable must run **IN** to the terminals, then **OUT** again. Spurs should be avoided where possible. If this is not possible, they should be no longer than one metre (one yard). Failure to observe this may lead to intermittent or broken communications link.

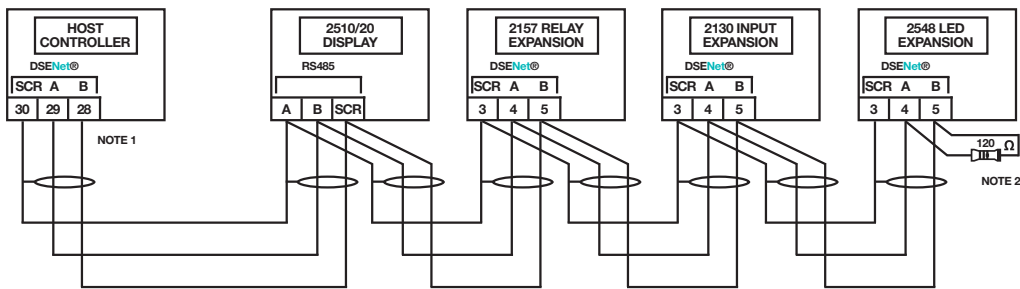

**NOTE 1**  
AS A TERMINATING RESISTOR IS INTERNALLY FITTED TO THE HOST CONTROLLER, THE HOST CONTROLLER MUST BE THE FIRST UNIT ON THE DSENet®

**NOTE 2**  
A 120 OHM TERMINATION RESISTOR MUST BE FITTED TO THE LAST UNIT ON THE DSENet®

### RELATED MATERIALS

| TITLE  | PART NO'S |
|--|-----------|
| DSE2510&DSE2520 Installation Instructions      | 053-064   |
| DSE2510&DSE2520 Manual                         | 057-105   |
| DSE7310&DSE7320 Data Sheet                     | 055-051   |
| DSE7310 Installation Instructions              | 053-028   |
| DSE7320 Installation Instructions              | 053-029   |
| DSE7510&DSE7530 Manual                         | 057-074   |
| DSE73xx Configuration Suite PC Software Manual | 057-077   |

**DEEP SEA ELECTRONICS PLC** maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

This data sheet is printed on 9lives 55 Silk, which is produced with 55% recycled fibre from both pre and post-consumer sources, together with 45% virgin ECF fibre.

