



C61F-GP2•

- Ideal for control of any conductive liquid levels
- AC operation
- Fully surge protected
- Low voltage(AC) electrodes
- Two LED provide status indication for water supply or drainage



+ SPECIFICATIONS

TOP ▲


Model		C61F-GP2•
Appearance		50H x 40W x 57.5D
Socket Type		PF085A
Sensing Mode	General	C61F-GP2
	High Sensing	C61F-GP2H
	Long Distance	C61F-GP2L
	Low Density	C61F-GP2D
	Two Line	C61F-GP2R
Rated Voltage		AC:110, 220, 240, 380, 415, 440, 50/60Hz
Indicator Operating		85~110% of rated voltage
Second Voltage		8VAC(except HIGH SENSING 24VAC)
Operating Resistance		4K Ω min.(GENERAL)
Release Resistance		15K Ω min.(GENERAL)
Response Time		Operator : 80 msec max,Release: 160 msec max
Contact Rating		5A, 250VAC(resistive load)
Length of Cable		1 Km max.(GENERAL)

+ CONNECTION DIAGRAMS

TOP ▲

CONNECTION DIAGRAMS	
C61F-GP2•	

General Water-Supply Running

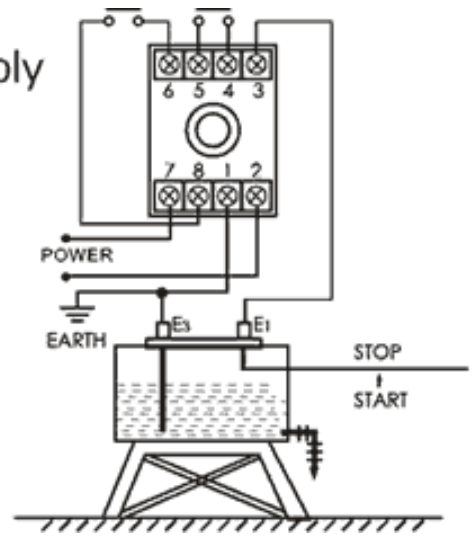

+ DIMENSION

TOP

C61F-GP2

